
Exit Indicator
4089

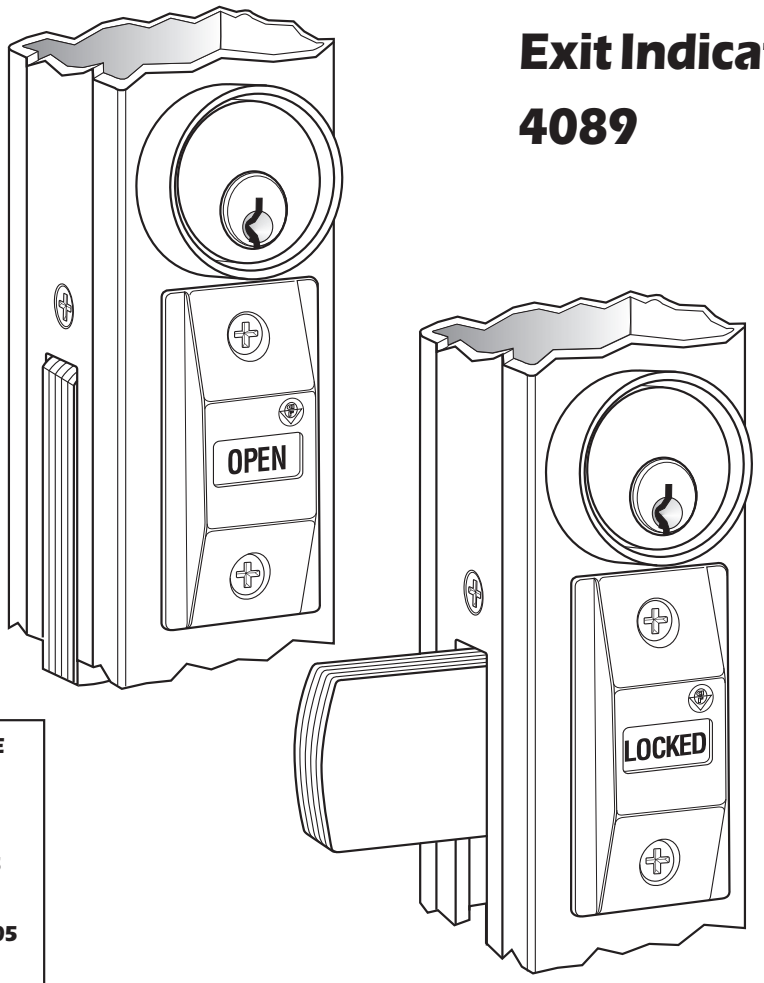

COMPATIBLE LOCKS:

1830
MS1837
MS1850S
MS1850S-505
SCH1850S
MS1850SN
MS1850SN-505
SCH1850SN
MS1860
1870
MS+1890

Function

Provides unmistakable notification of an exit door's "locked" or "open" condition. Under many local building safety codes, this allows the use, in certain occupancies, of a security deadlock instead of less secure panic devices. It includes two permanent adhesive header signs: "THIS DOOR TO REMAIN UNLOCKED DURING BUSINESS HOURS." (That wording is according to Uniform Building Code.) The second sign for NFPA and other local codes reads: "THIS DOOR TO REMAIN UNLOCKED WHEN THE BUILDING IS OCCUPIED."

Message Panel

"OPEN" appears in black letters on white background when lock is retracted and "LOCKED" in red letters when actuated. Also available with red (locked) and green (unlocked) wordless panels.


Material/Finish


Indicator escutcheon is zinc alloy with 130 (Satin Aluminum) Ritecoat finish. See page SW-39 for other Ritecoat finishes. Header sign is clear aluminum match with black letters.

Adams Rite
ASSA ABLOY

260 Santa Fe Street
Pomona, California 91767
(800) 872-3267 Fax:(800) 232-7329
www.adamsrite.com

INCHES
MILLIMETERS
Nominal, subject to tolerance extremes.

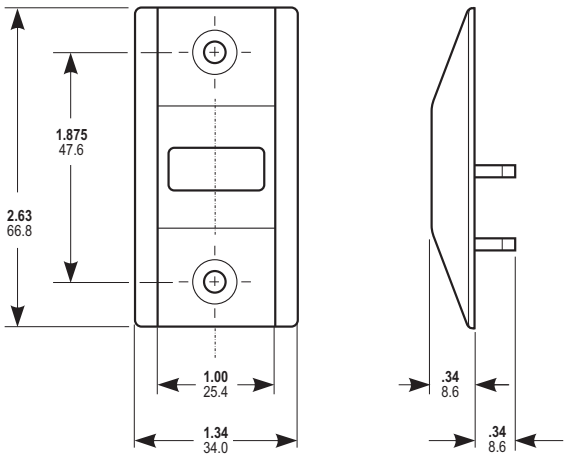

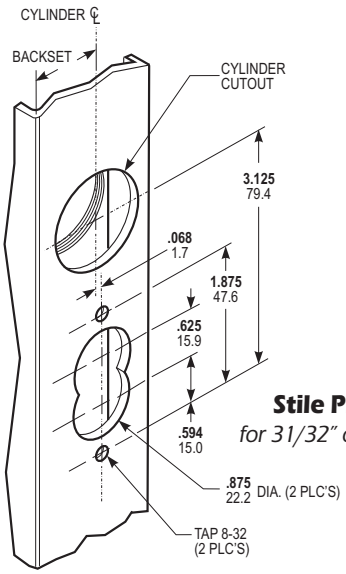


Stile Preparation
for 31/32″ or 1-1/8″ Backset

HEADER SIGN - IN TWO PIECES*



* This sign correct under Uniform Building Code.
Also includes NFPA wording "THIS DOOR TO REMAIN UNLOCKED WHEN THE BUILDING IS OCCUPIED".

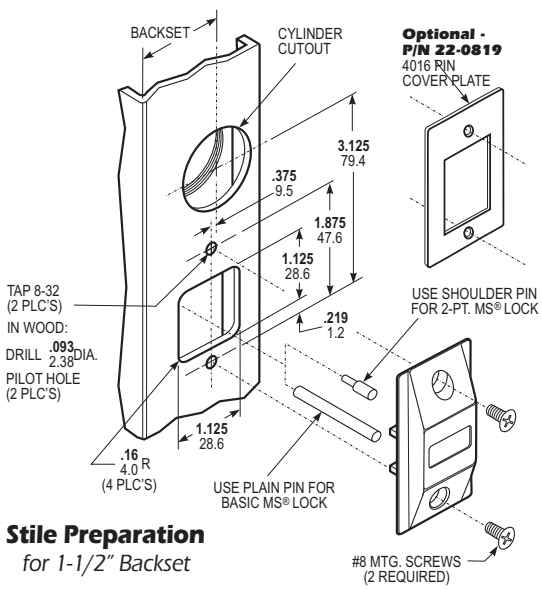

Stile Preparation
for 1-1/2″ Backset

Specify quantity and the following information.

Options

-00 Standard - 1-3/4″ Door
-01 For Inverted Lock
-20 For doors up to 2-1/2″
(Standard unit fits 1-3/4″ doors)

Finish

Satin Aluminum
Satin Black
Dark Bronze

Standard unit fits 1-3/4″ doors. Specify for thicker doors up to 2-1/2″.

4089 -01 -130

Shipping weight: 1/2 lb.

©2011 ADAMS RITE MANUFACTURING CO.