
Eurostyle Deadlatch Handles

4568, 4569

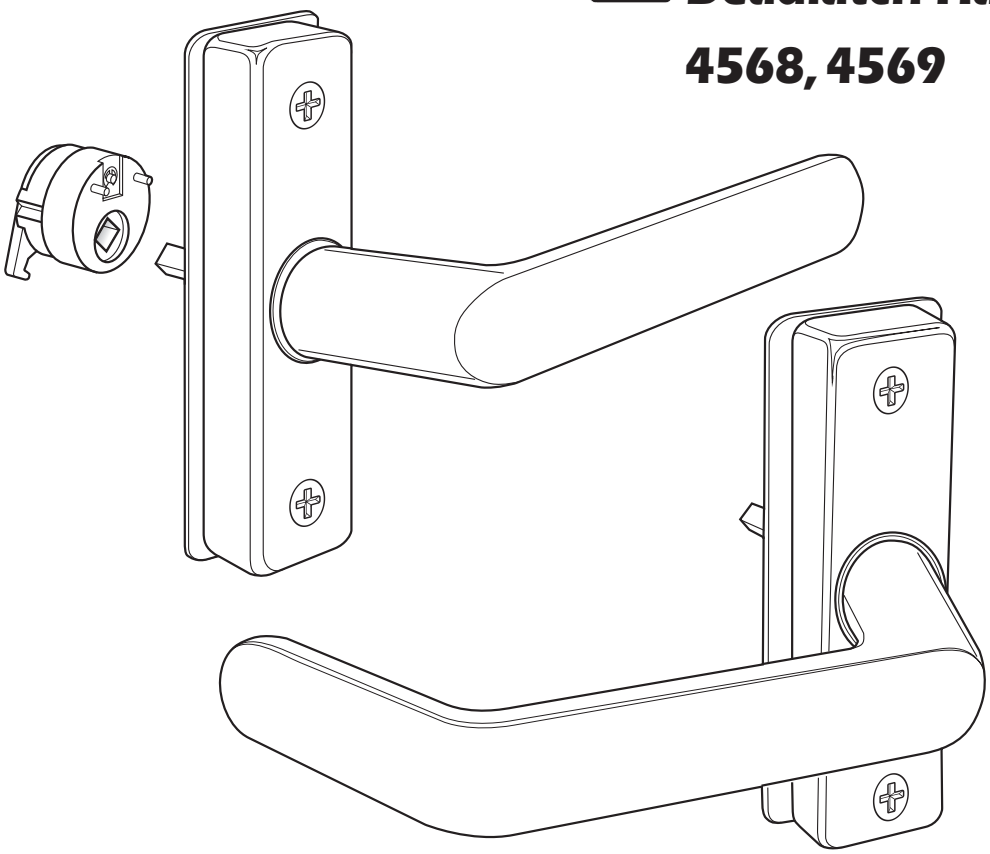

Escutcheons

1-3/8" x 4", designed to match the narrow stile door's clean lines. Steel mounted base is secured by hidden screws and has two large helical compression springs. (One becomes a "spare" once handling is given.) A 1/4" square heat-treated spindle is part of escutcheon assembly, which interlocks with the cam plug. Finished to match lever.

Function

Designed to operate 4500/4700/4900 Series latches by a natural downward hand movement. These handles incorporate an activator cam disc that mounts on the handle escutcheon and fits solidly into the cylinder hole of the latch. Not intended for use as a door pull.

Cam Plugs

Secured in latch body by cylinder setscrew, plug is also rigidly tied to handle escutcheon by hardened steel pins. Handing can be reversed by removing a spring clip, "flopping" the cam and replacing the clip.


Levers


Lever of cast aluminum, in choice of 130 Satin Aluminum, 121 Dark "Bronze" or 119 Black. Modern European styling offers a generous hand grip with shank offset away from the narrow stile jamb for hand safety. 4569 has return end to meet anti-snag code requirements.


Adams Rite
ASSA ABLOY

260 Santa Fe Street
Pomona, California 91767
(800) 872-3267 Fax:(800) 232-7329
www.adamsrite.com


INCHES
MILLIMETERS
Nominal, subject to tolerance extremes.

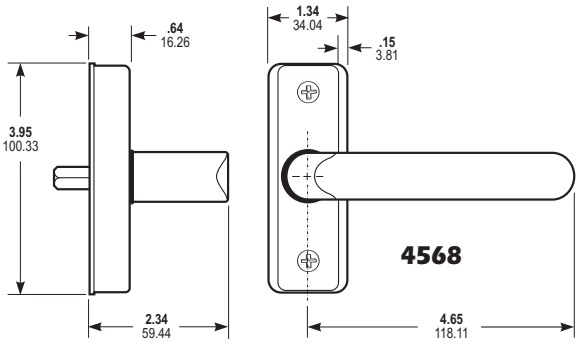



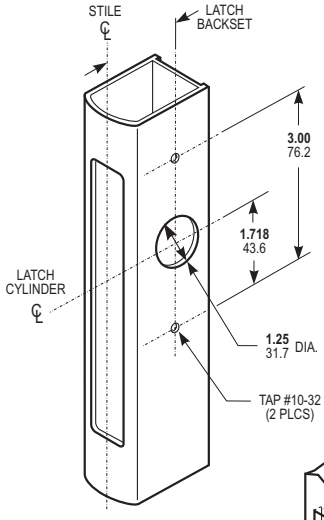



Narrow Stile Preparation

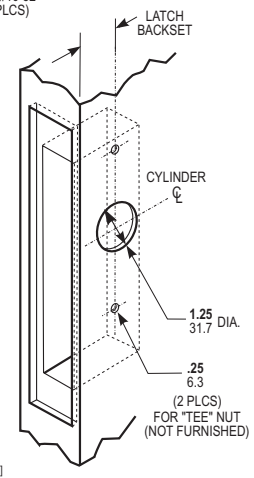

Wood Door Preparation

(Hole locations same as above.)



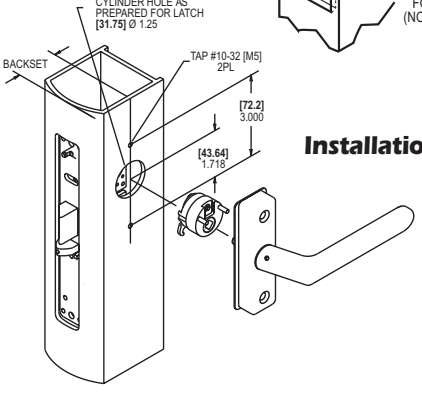

Installation

Specify quantity and the following information.

Lever Type
Straight
Return End

Handing*
using MS+1890
LH or LHR
RH or RHR

Door Thickness For 4500/4700/4900
1-3/4" - 2"
2-1/4" - 2-1/2"
2-3/4" - 3"
3-1/4"

4568-501-121

Door Thickness For MS+1890
1-3/4" - 1-15/16"
2" - 2-1/4"
2-5/16" - 2-3/4"
3"

Finish (Painted to Match)
Satin Aluminum
Dark Bronze
Satin Black
Bright Brass
Satin Chrome

**Assuming handle on interior of door.*

Pre-handing can be specified LH or RH although re-handing in the field is easily accomplished. Standard handles are for 1-3/4" thick doors. Available on special order for doors up to 3-1/4" at extra cost.

Packed individually with cam plug handed LH or RH as specified. Two 10-32 mounting screws furnished. Shipping weight: 1/2 lb.

©2011 ADAMS RITE MANUFACTURING CO.