
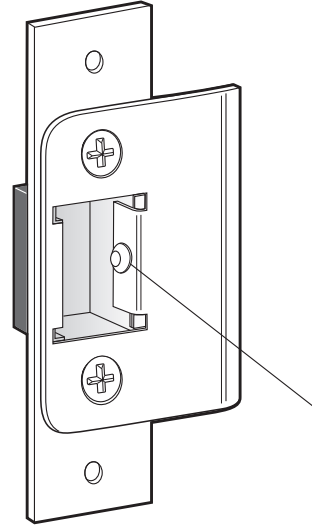


## Deadlatch Strikes For Aluminum Frame/Doors

### 4901, 4902

For use with 4900/4500/4700/4300 Deadlatches

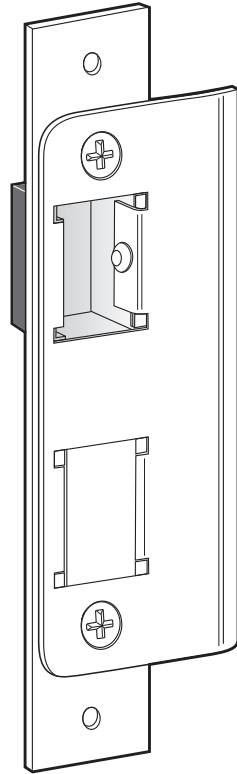

### Function

Designed for use in conjunction with 4500, 4700, 4900, 4300 (4901 only) Series deadlatches, these strikes offer a choice of mounting methods: a back-up mounting plate included with the 4901 and 4902 allows installation flush in a hollow section jamb. Use 4506-02 ANSI strike for wood or steel jambs. All strikes are unhandled, suitable for right or left hand doors. Strike plate material is stainless steel.

#### 4901-01

Standard FLAT strike includes molded black plastic dust box and closure of the unused lower strike opening, with steel mounting plate. Long face is designed to span strike area of MS® deadbolts with which the deadlatch is interchangeable.

#### 4901-02

Same as 4901-01, except with RADIUSED strike plate, for nose of opposite door when latching pairs.

#### 4902-01









Standard FLAT strike furnished with the 4900 Series deadlatches. Includes molded black plastic dust box and steel mounting plate. Short face design.

#### 4902-02

Same as 4902-01, except with RADIUSED strike plate, for nose of opposite door when latching pairs.

**INCHES**  
**MILLIMETERS**

Nominal, subject to tolerance extremes.

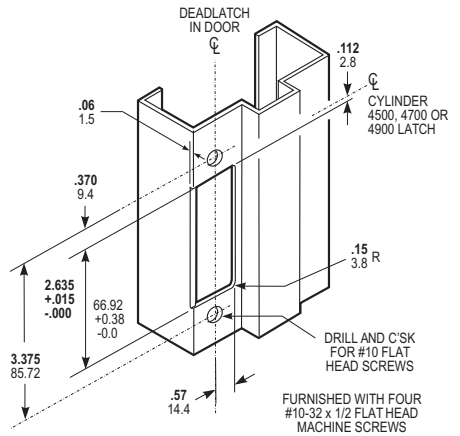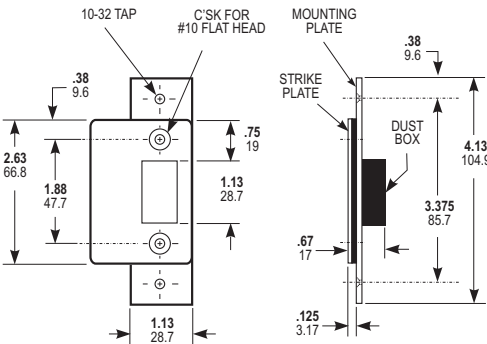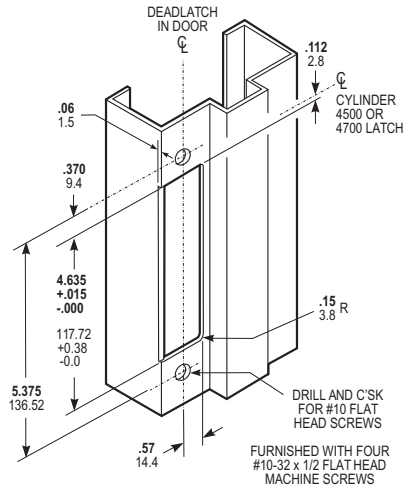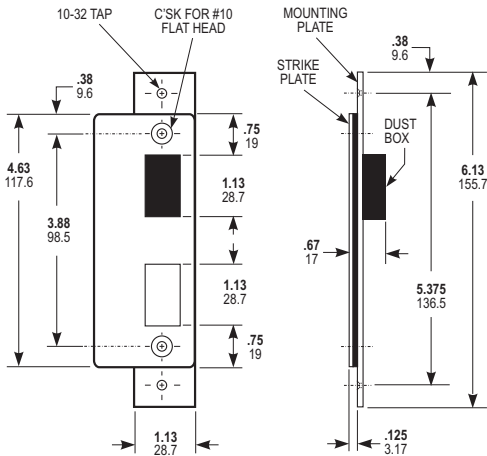

Specify quantity, PART NUMBER and DASH NUMBER.  
Order wood screws separately.

**Part No. Long Type Strike**

4901-01	FLAT, with Dust Box and Mounting Plate
4901-02	RADIUS, with Dust Box and Mounting Plate

**Part No. Short Type Strike**

4902-01	FLAT, with Dust Box and Mounting Plate
4902-02	RADIUS, with Dust Box and Mounting Plate

**Long Lip For Centerhung Door**

Replace -01 with:

DASH	FOR CENTER OF:	DIM. "A"
-03	2.25" Wide Jamb	1.125
-05	2.50" Wide Jamb	1.25
-07	2.75" Wide Jamb	1.375
-09	3.00" Wide Jamb	1.50
-11	3.25" Wide Jamb	1.625
-13	3.50" Wide Jamb	1.75
-15	3.75" Wide Jamb	1.875
-17	4.00" Wide Jamb	2.00
-19	4.25" Wide Jamb	2.125
-21	4.50" Wide Jamb	2.25

