

# 100, 300, 400 Series Alarmed Hardware

## Premier Product

### 100 Series exit alarm

#### General Specifications:

**Chassis**–Non-ferrous alloy cover and base, 8-3/8" (212.72 mm) x 2" (50.8 mm) x 2-5/8" (66.67 mm). Tamper-proof cover screw sets unit into alarm upon unauthorized removal of the cover.

**Power/Electronics**–9 volt battery powered. Modern, solid state electronics. Magnet activated.

**Doors**–For inward or outward swinging doors with 4" minimum stile.

**Alarm/Horn**–Alarm sounds for 2 minutes, shuts off and automatically rearms itself. Piercing, high frequency horn. Rated for 90 decibels at 6 feet.

**Cylinders**–Inside cylinder operation to arm or disarm unit using 1-1/8" (28.57 mm) mortise cylinder. Outside rim cylinder operation standard. (Order cylinders separately).

**Hand**–Non-handed.

#### Features:

**110 Series**–Push button test to determine available battery power.

**130 Series**–15 second delay upon arming permits key holder to exit door without sounding alarm.

Low battery alert causes unit to chirp intermittently to indicate low battery power.

Red LED indicator flashes when violation occurs. Light continues to flash beyond alarm cycle and can only be turned off by the inside key.



#### Finishes:

Powder coated painted finishes: AL BRZ, RD.

Hardware finishes: US10, US10B, US26, US26D.

### 130N Series exit alarm

#### General Specifications:

**Chassis** – Base is 8.3" L x 3.1" x 2.0" D

**Power/Electronics** – 9-Volt Alkaline battery (supplied).

**Alarm/Horn** – This alarm features a Peizo horn which blasts a deafening 105+ decibels to alert the violation. Manual or automatic alarm reset adjustable for 2, 5 or 10 minutes.

**Cylinders** – Each unit is supplied with keyed-alike cam lock to hold cover in place. Mortise cylinder for interior arming/disarming and rim cylinder for exterior arming/disarming if required are ordered separately.

#### Features:




Adjustable REX and Passage Time Delay for 7, 10, 15, or 20 seconds. Adjustable LED's colors indicating armed or violated states.



#### Finishes:

AL.

#### Typical Installation:

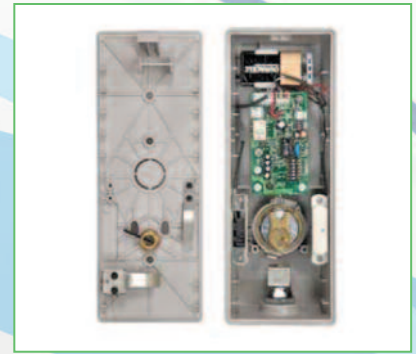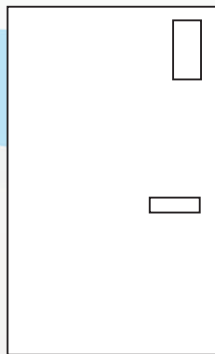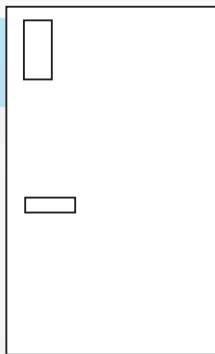

# 100, 300, 400 Series Alarmed Hardware

## Premier Product

### 100, 300, 400 Series trim

#### Exit Alarm Trim






Matching trim available to complement other series of cylindrical locks, BM Series Mortise locks, exit devices and alarms.

#### Ordering information:

When ordering trim, specify design symbol and function, eg: **BR12**, if specifying **Broadway** lever in **Storeroom** function.

#### Finishes

US3, US10, US10B, US26, US26D. (Knobs and levers)  
AL, BRZ, RD. (SF Trim)

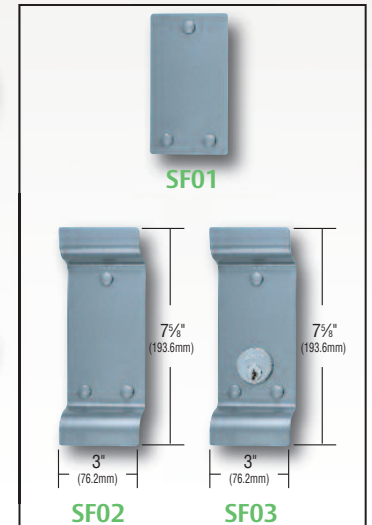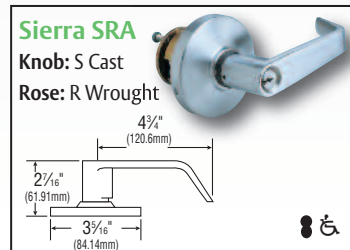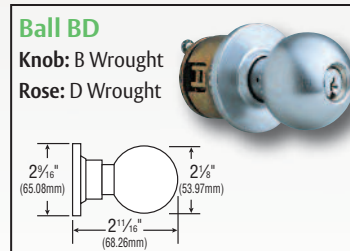

### 100, 300, 400 Series accessories

#### Functions

**01 Passage** – Knob always active. Turning knob retracts latch and puts alarm into 15 second delay mode. (Latch retraction by knob sets off alarm is optional).

**08 Dummy Trim** – Single pull only.

**12 Storeroom** – Knob always rigid. Key retracts latch and puts alarm into 15 second delay mode.

**17 Classroom** – Key locks or unlocks knob. Turning knob retracts latch and puts alarm into 15 second delay mode.

#### Thru Bolts

**#S30** (300, 400 series, 1-3/4" doors).

**#S32** (F-400 series, 1-3/4" doors).

Specify finish: AL, BRZ.

To add extra strength to mounting.

#### Narrow Stile Mounting Plates

**#S73** (100 series).

**#S74** (300 series).

**#S75** (400 series).

Specify finish: AL, BRZ.

For doors with stile widths 1-3/4"–4". Not for use with F-400 series.

#### Surface Magnet Pack

**#580** Magnet and shim for 100 series (furnished with alarm).

### Options:

#### Automatic Rearming

- Units are provided with spring loaded on/off switch. Switch automatically returns to the on position after removal of the key.
- Alarm can never be left off.
- Available for all alarm models.
- Prefix AR to catalog number.

#### Remote Monitor

- Alarm units are supplied with 8-foot leads of wire. Wire attached to the electronics assembly to allow monitoring from a remote location.
- Can be used in conjunction with Arrow S40 remote panel or with panel, light or bell provided by others.
- Closed loop circuitry provides highest security.
- Prefix RM to catalog number (not available on 110 or 130 models).

#### Continuous Alarm

- Horns will sound continuously after a violation has occurred—does not shut off after 2 minute alarm cycle.
- Only disarming by key operation will quiet the alarm.
- Remote power is recommended for units with this feature.
- Prefix CA to catalog number (not available on 110 or 130 models).

#### Remote Power

- Alarm units are supplied with 8-foot leads of wire. Wire attached to electronics assembly to power unit from an external source.
- Can be used in conjunction with Arrow S63 Hard Wired Battery Eliminator or by other remote 9V power source.
- Prefix RP to catalog number (not available on 110 and 130 models).

### Strikes:

